NM CONDO

PRIMARY SUITE, GUEST BATHROOM & LIVING ROOM - FINISH & FIXTURE DRAWINGS


Issued 4 November 2026 for Nada & Mazen. Design direction by DesignMySpace Inc. (Dalia Elkhatib, BID). Drawn from the 16 Jul 2026 base plan, the 4 Nov 2026 refined plan, the 27 Sep 2026 Specification Schedule, the 4 Nov 2026 options email and the owners' selections.

SELECTIONS LOCKED FOR THIS SET

ITEM	SELECTION	BASIS	KEY
Ensuite tub wall + servery counter/sink	CAVA Surfaces Glacier Grey quartzite, POLISHED, 2 cm	Owner (4 Nov; polished 10 Nov)	**ST-1**
Beige tile - bedroom, servery, make-up floor; tub cladding	Couture - Beige	Picked for you: first of the three Nov 4 options, closest to the mood board	**FL-2 / ST-2**
Bedroom floor	FL-2 tile with the Milliken Fiddlehead rug on top, nightstand to nightstand	Owner (4 Nov) - hardwood dropped in the bedroom	**FL-2 / FL-4**
Ensuite floor	Couture - Beige, same tile as the bedroom (Antica dropped)	Owner (4 Nov)	**FL-2**
Bed	KING 76" x 80" with 20" built-in nightstands	Owner (4 Nov)	**FB-1 / MW-2**
Stained wood millwork	Match Tafisa Casting at First Light	Picked for you: lighter of the two, matches the "white oak" direction	**MW-1**
Painted millwork	Benjamin Moore Swiss Coffee OC-45, plywood interiors	Picked for you: same brand as walls; plywood per 27 Sep spec	**MW-2**
Bedroom walls & ceiling	Benjamin Moore White Dove OC-17	Picked for you: neutral warm white that sits between Swiss Coffee millwork and the oak floor	**PT-1**
Guest shower walls + bench top	Grey quartzite with gold / beige veining (name TBC)	Owner (10 Nov) - alts: green-black, Noir Blanc + 3 photos (A-4)	**ST-3**
Guest vanity top	White Camouflage quartzite	Picked for you: strong contrast against the black ST-3; Taj Mahal is the alternate	**ST-4**
Guest floor	Ciot Nova Como 23.6" field + Nova Satin 3" x 12" border	Picked for you: 27 Sep spec - alts: DecoTile pick (4 Nov); dark grey or light grey tile (owner 11 Nov)	**FL-5 / FL-6**
Guest vanity	Stained white oak, vertical grain	Picked for you: 27 Sep spec and mood board	**MW-3**
Sinks (3)	Contrac Calvin 4220CFY undermount	Picked for you: lower cost than stone-integrated	**P-4**
Ensuite toilet	TOTO Washlet G5A, 1.2 GPF	Owner (4 Nov)	**P-6**
Living room TV wall	Option 1 + July brief; 65" TV (75" fits), Sony Quad + sub	Owner (5 Nov)	**A-8**
Living room millwork	Painted, high-gloss white lacquer (option A)	Owner (7 Nov) - alt. C: Swiss Coffee + greige	**MW-5 / MW-6**
Living room AC unit	Left as is; floating shelves below it	Owner (5 Nov)	**A-8**
Hardware	Richelieu 8650 knob (suite), 2584 pull (guest), brushed nickel	27 Sep spec	**HW-1 / HW-2**

Items marked "Picked for you" are my choices among the options Dalia offered, made so the drawings could be completed; any of them can be swapped and the set re-issued.

PALETTE

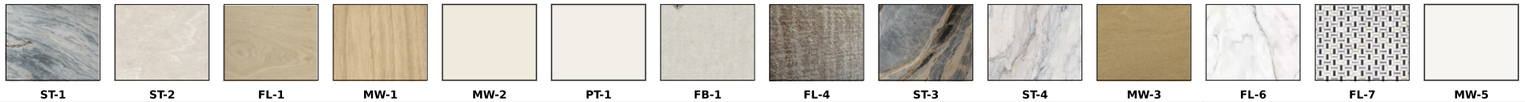

DRAWING INDEX

A-0 Cover, selections locked for this set, drawing index

A-1 Finish plan - primary suite (bedroom, walk-in closet, make-up/dressing, servery, ensuite), finish legend

A-2 Fixture & plumbing plan - ensuite / servery, enlarged, rough-in dimensions, plumbing schedule

A-3 Interior elevations A-D - ensuite tub wall, ensuite north wall, servery, make-up vanity

A-4 Guest bathroom - plan and elevations E-F (size from Polycam scan)

A-5 3D isometric cut-away finish studies - ensuite, servery, guest bath

A-6 Bedroom millwork elevations G-H and closet interior G1 - TV wall, bench / headboard

A-7 Primary bedroom 3D views - looking SE (headboard wall) and NW (TV / closet wall)

A-8 Living room TV wall - elevations J / J1, section K

A-9 Living room 3D view - TV wall


A-10 Dressing-area wardrobe - enlarged plan, elevation L, interior L1

A-11 Dressing area 3D view - make-up vanity and wardrobe (isometric cut-away)

BEFORE THIS SET CAN BE USED FOR CONSTRUCTION

- Main room dimensions, window, entry and ceiling heights are now from the Polycam scan (16 Jul 2026); the guest bath now follows the scan (entry jog and 3'-3" opening, WC on the existing flange); confirm the guest door and the rear-zone partitions on site.
- Measure the existing AC head, ERV and its cabinet on the bedroom north wall (positions on A-1/A-6/A-7 are estimated from a photo).
- Expose and record the existing drain and supply locations (tub, WC, servery sink, guest fixtures).
- CAVA: reserve 1-2 polished Glacier Grey slabs from block 001 for book-matching (A-3 note 1); get the name, supplier, finish and slab size of the grey / gold guest-shower stone and reserve 2 slabs (A-4 note 1).
- Order the samples listed on the Selections doc and get Dalia's yes/no.
- Living room: site-measure the TV wall (16'-5" survey vs 16'-9" scan), confirm the SA-SW5 sideways placement in the credenza end bay with Sony.
- Contractor to confirm ceiling height, slab depression at the guest shower, and electrical for the washlet, mirrors and sconces.

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-0 COVER & SELECTIONS** Drawing set issued for owner review and contractor budgeting	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-0**

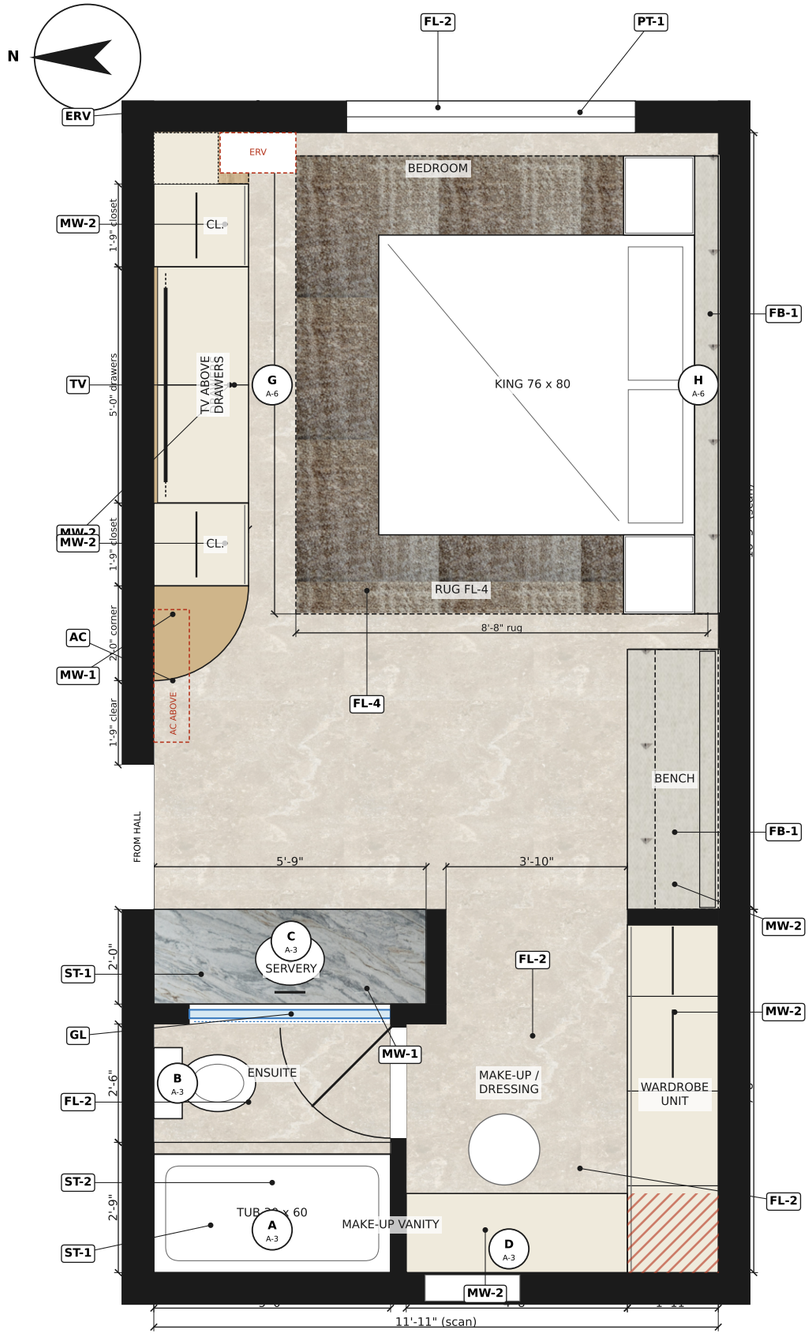

FINISH LEGEND

FL-1 Hardwood - 7.5" Yukon European Oak
Living areas only - NOT in the bedroom (superseded by FL-2 + FL-4, 4 Nov)

FL-2 Porcelain tile - Couture - Beige (large format)
Bedroom, ensuite, servery and make-up/dressing area floor (one tile throughout)

FL-4 Carpet inset - Milliken Imagine Figurative - Classic Counterpart, Fiddlehead
Bedroom area rug laid on FL-2, approx. 8'-8" x 9'-8", to the headboard wall

FL-5 Porcelain tile - Ciot Nova Satin RT 3" x 12" (border, running bond)
Guest bath floor border

FL-6 Porcelain tile - Ciot Nova Como 23.6" x 23.6"
Guest bath floor field. Alternates (owner 11 Nov, names TBC): dark grey concrete-look; light grey stone-look

FL-7 Stone mosaic - Grey/white basketweave mosaic (per mood board)
Guest shower floor

ST-1 Quartzite slab - CAVA Surfaces Glacier Grey quartzite, POLISHED, 2 cm (owner 10 Nov), slab 119" x 74", block 001
Servery counter, sink + 4" backsplash; ensuite tub walls full height

ST-2 Porcelain tile - Couture - Beige, mitred
Ensuite tub apron, top and ends

ST-3 Quartzite slab - Grey quartzite, gold / beige veins (owner pick 10 Nov, name TBC)
Guest shower walls full height, bench top. Alternates: green-black, Noir Blanc + 3 slab options (A-4 note 1)

ST-4 Quartzite slab - White Camouflage
Guest vanity counter + sink

MW-1 Stained wood millwork - Match Tafisa Casting at First Light (white oak look)
Servery cabinet, TV niche back panel, make-up top

MW-2 Painted millwork - Benjamin Moore Swiss Coffee OC-45; plywood interiors
Bedroom closets + TV/drawer unit, dressing-area wardrobe unit, make-up pedestals, headboard surround

MW-3 Stained white oak - Vertical grain, slightly darker than FL-1
Guest vanity

PT-1 Paint - Benjamin Moore White Dove OC-17, walls & ceiling
Bedroom, closet, make-up area, guest bath above tile

FB-1 Upholstery - JF Fabrics Presley 30, colour 9361
Headboard and bench

HW-1 Cabinet knob - Richelieu Transitional Metal Knob 8650, brushed nickel
Bedroom suite millwork

HW-2 Cabinet pull - Richelieu Modern Metal Pull 2584, brushed nickel
Guest vanity

GL Fixed glass partition between the servery and the ensuite, 4'-3" wide centred on the counter (9" solid each end), floor to ceiling, sheer curtain on the ensuite side (no stone on this wall)

PLUMBING FIXTURES: see schedule on A-2

GENERAL NOTES

1. Room width, bedroom depth, window, entry and ceiling heights are from the Polycam scan of 16 Jul 2026; the rear-zone layout follows the DesignMySpace plans. VERIFY ON SITE before ordering slabs or millwork.

2. Tub, toilet and servery sink stay on existing plumbing positions. Confirm stack and drain locations before finalizing the servery counter.

3. ST-1 Glacier Grey: book-match veining at the tub walls; counter and backsplash from the same block. The servery/ensuite partition is GLASS (GL), not stone. Finish: POLISHED (owner 10 Nov).

4. All plumbing trim brushed nickel. Cabinet hardware HW-1 (Richelieu 8650) throughout the primary suite.


5. Ceiling height assumed 8'-0" for elevations; adjust slab heights to actual.

6. Alternates from the 4 Nov options email, not drawn: Arabescato Corchia / Calacatta Paonazzo (superseded by ST-1 at owner request); Sublime Beige / French Vanilla (FL-2 alternates); Apres-Ski (MW-1 alternate); SW 7627 White Heron (MW-2 alternate).

7. TV wall (owner revision 5 Nov): MW-1 quarter-round corner shelves under the AC, a 21" closet 6" clear of the AC, a 5'-0" two-column drawer unit (30" high) with a 55" TV (65" fits) wall-mounted above at 60" centre on an MW-1 fluted wood back panel, a second 21" closet in the old position by the ERV, and three open MW-1 shelves recessed in the 13" pocket under the ERV (25" clear below it) - see A-6. The south side of the dressing area is a built-in wardrobe unit (cabinets, rods and drawers, no walls or door), 2'-0" deep, open to the make-up area. Bedroom floor is FL-2 tile with the FL-4 rug laid on top (blue = tile on the 4 Nov sketch); the bed, nightstands and headboard are centred on the TV; the rug runs under the nightstands to the headboard wall and from the west nightstand to the east wall. The short wall at the bench end is existing and stays; the bench is extended east and stops 9" short of the west nightstand.

8. Guest bathroom: see A-4.

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-1 FINISH PLAN - PRIMARY SUITE** Scale 5/16" = 1'-0" (on 11 x 17)	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-1**

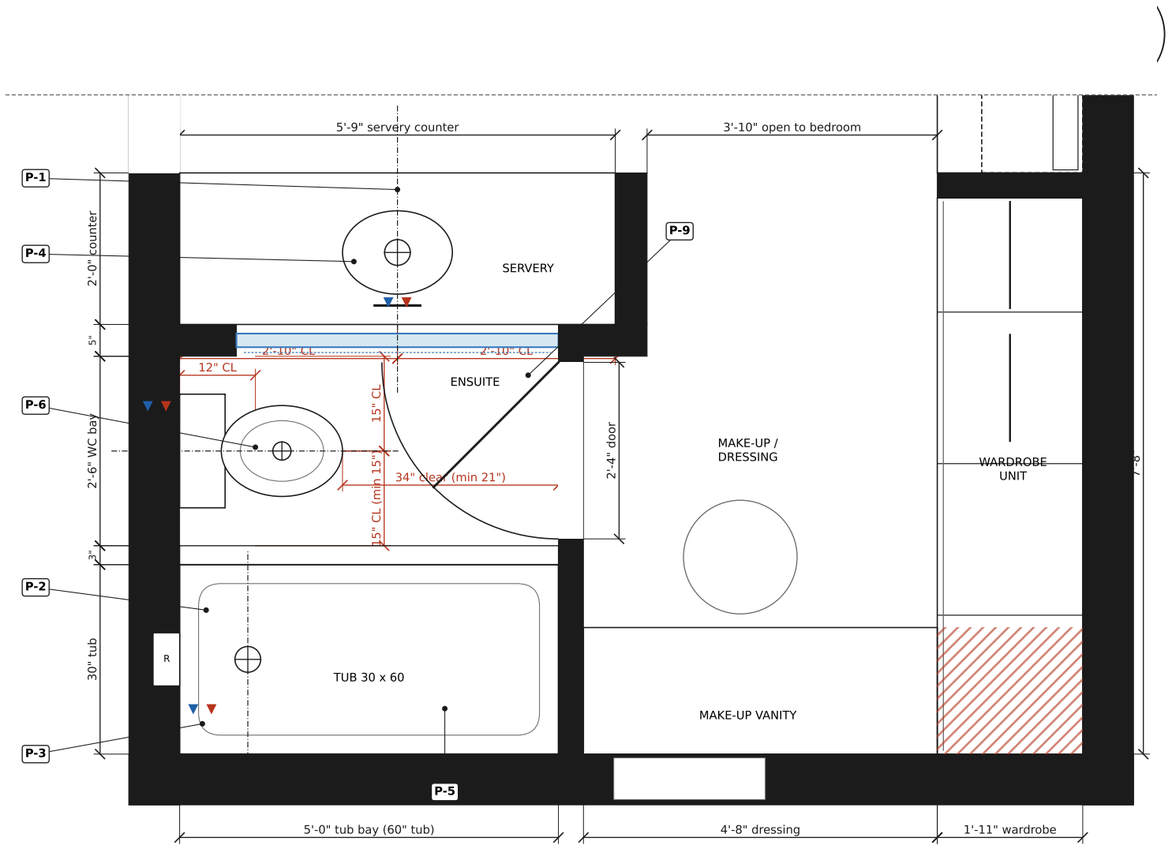


PLUMBING FIXTURE SCHEDULE

TAG	ITEM / SPEC	LOCATION
P-1	Faucet - hansgrohe Vivenis Widespread 90, pop-up drain, 1.2 GPM, 75033831, brushed nickel	Servery, guest vanity
P-2	Tub spout - hansgrohe Vivenis 75410001, brushed nickel	Ensuite
P-3	Shower kit - Hand shower on slide bar + rain head + thermostatic trim, brushed nickel (Roman Bath Centre, match Vivenis). Guest shower: 12" ceiling rain head and a thermostatic valve with 3-way diverter (rain / hand shower / P-10 spout)	Ensuite over tub; guest shower
P-10	Low spout - Wall spout matching the Vivenis family (e.g. hansgrohe Vivenis spout 75410001), 21" AFF, fed from the 3-way diverter - bucket filling / foot rinse	Guest shower
P-4	Undermount sink - Contrac Calvin 4220CFY	Servery, guest vanity
P-5	Tub - Porto White 60" x 30" drop-in, with drain	Ensuite
P-6	Toilet - TOTO Washlet G5A one-piece, 1.2 GPF, Cotton White	Ensuite
P-7	Toilet - Contrac Eglinton TL-3100A one-piece elongated, 4.8 LPF	Guest bath
P-8	Linear drain - In-lay tile-top linear drain, 20", along the bench wall under the floating bench	Guest shower
P-9	Accessories - Towel ring, 2 hooks, 24" bar, paper holder - brushed nickel, match P-1 family	Both baths

ROUGH-IN & CLEARANCE NOTES


1. All fixtures remain on existing drain/vent locations (condo slab). Dimensions shown are design intent; contractor to expose and measure existing rough-ins before slab fabrication.
2. WC: 12" rough-in assumed for the TOTO G5A. Centreline 15" min to the tub apron and to the WC bay wall; 21" min clear in front of the bowl (Ontario Building Code / manufacturer minimums). The 2'-6" WC bay gives exactly 15" each side - no tolerance, so confirm the existing flange position before tiling. Plan shows 34" clear in front.
3. G5A washlet needs a GFCI receptacle beside the toilet (right side when seated) and a cold-water tee - add to electrical/plumbing scope.
4. Tub: Porto 60 x 30 drop-in; drain at north end, valve and spout on the north wall, shower riser (P-3) above. Confirm overflow and drain hand with the actual tub before framing the deck.
5. Servery sink: Contrac Calvin undermount centred on the 5'-9" counter; Vivenis widespread deck-mounted, 8" spread. The wall behind the counter is a GLASS partition, so supplies and drain cannot run in it: bring them up through the cabinet floor from the ensuite rough-in or along the north wall, and confirm the route before the glass is ordered.
6. Slab counter ST-1: 2 cm with mitred 1 1/2" apron edge; sink cut-out templated after cabinet install. Tub deck and apron ST-2 tile, mitred corners.
7. Accessories P-9: towel bar 24" on the ensuite door wall, ring on the north wall beside the servery counter, hooks behind the ensuite door, paper holder on the WC bay wall at 26" AFF.
8. Hot (red) / cold (blue) supply symbols indicate side only; all supplies through walls, not the floor.

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-2 FIXTURE & PLUMBING PLAN - ENSUITE / SERVERY** Scale 1/2" = 1'-0" (on 11 x 17)	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-2**

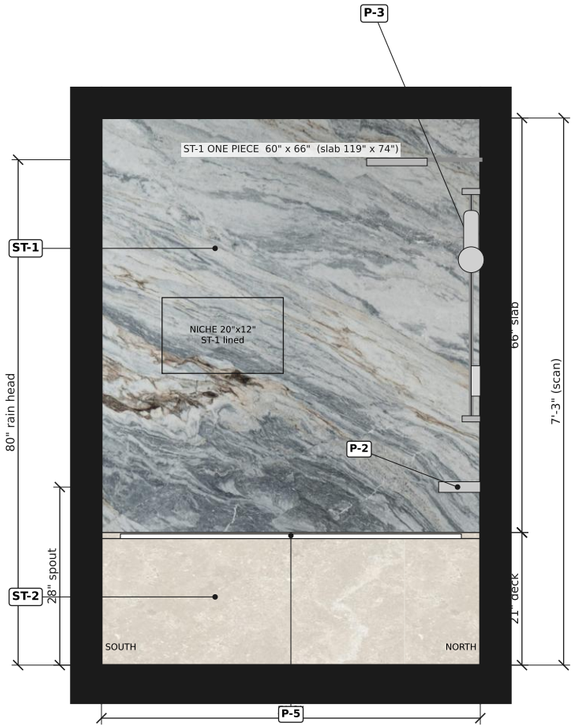


A **ENSUITE - TUB WALL (WEST)**

Scale 1/2" = 1'-0"

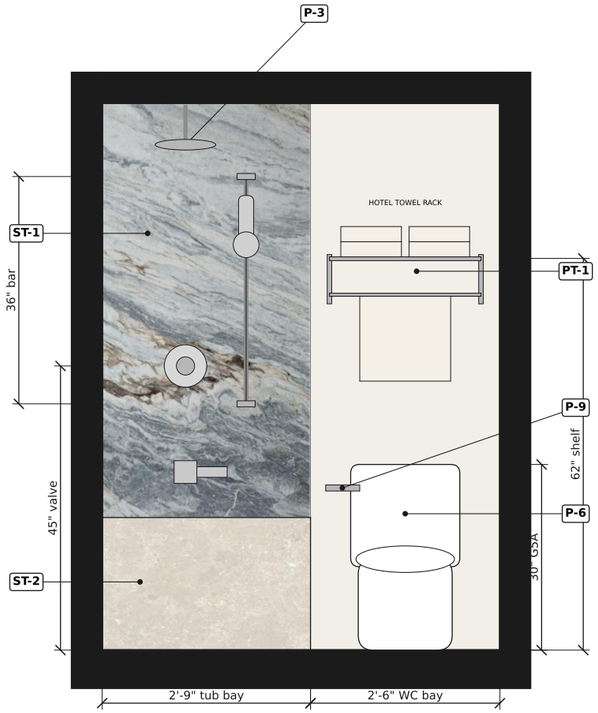


B **ENSUITE - NORTH WALL**

Scale 1/2" = 1'-0"

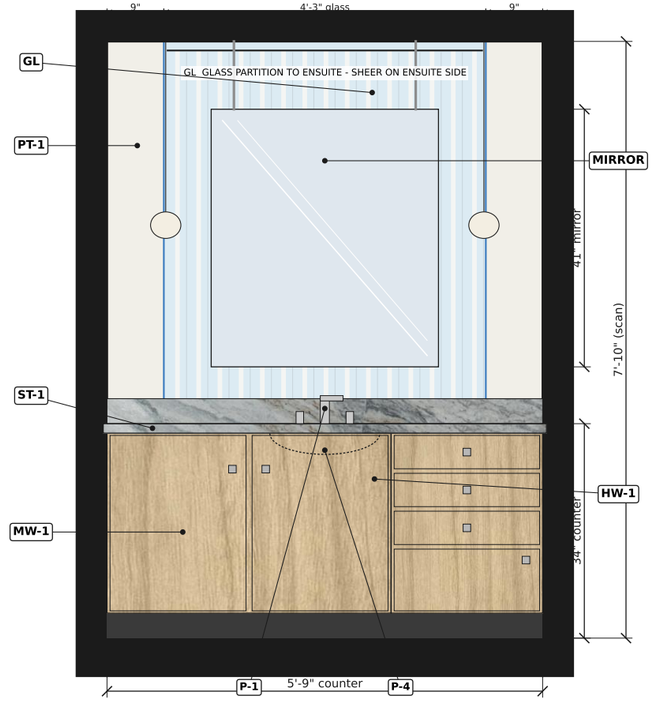

C **SERVERY (FROM BEDROOM)**

Scale 1/2" = 1'-0"

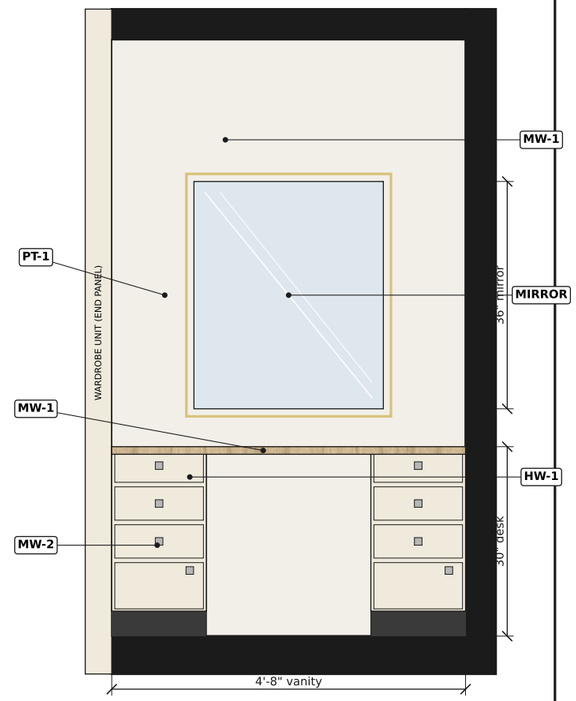

D **MAKE-UP VANITY**


Scale 1/2" = 1'-0"

ELEVATION NOTES

1. ST-1 Glacier Grey polished quartzite, 2 cm (CAVA, 119" x 74" slab, block 001). With the 7'-2" bathroom ceiling (scan) the pieces are: tub wall (A) 60" x 66" deck to ceiling; side tub wall (B) 33" x 66"; servery counter 69" x 24" plus 4" backsplash. Both tub-wall pieces fit side by side on ONE slab, and the counter fits in the 27" x 74" off-cut - one slab can do it, a second from the same block gives book-match options. Fabricator to confirm yield.
2. Tub deck and apron ST-2 Couture Beige, mitred edges; deck top at 21" AFF (Porto tub rim). Confirm tub height before setting the deck.
3. Rain head at 80" AFF (7'-2" ceiling), thermostatic valve at 45", slide bar 36" (centre 51"), spout at 28" - all brushed nickel, hansgrohe Vivenis profile. Rain head arm 12" projection from the north wall.
4. Servery: the wall behind the counter is a fixed GLASS partition to the ensuite, 4'-3" wide and centred on the counter with 9" of solid wall each end, with a sheer on a ceiling track on the ensuite side - no slab on this wall. Counter at 34" AFF with a 4" ST-1 backsplash; mirror 36" x 41" hung from the ceiling on two rods, pendant lights each side (electrical by others). Base cabinet MW-1 stained wood, vertical grain, knobs HW-1.
5. Make-up vanity at desk height 30" with 26" knee space, drawer pedestals MW-2 painted, top MW-1 wood; LED-edge mirror 30" x 36". Electrical: receptacle each side at desk height.
6. Ceilings from the Polycam scan (16 Jul 2026): ensuite 7'-2", bedroom / servery / make-up 7'-10". All niche and mirror positions to be confirmed on site with the owners before slab cutting.




PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-3 INTERIOR ELEVATIONS - PRIMARY SUITE** Scale 1/2" = 1'-0" (on 11 x 17)	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-3**

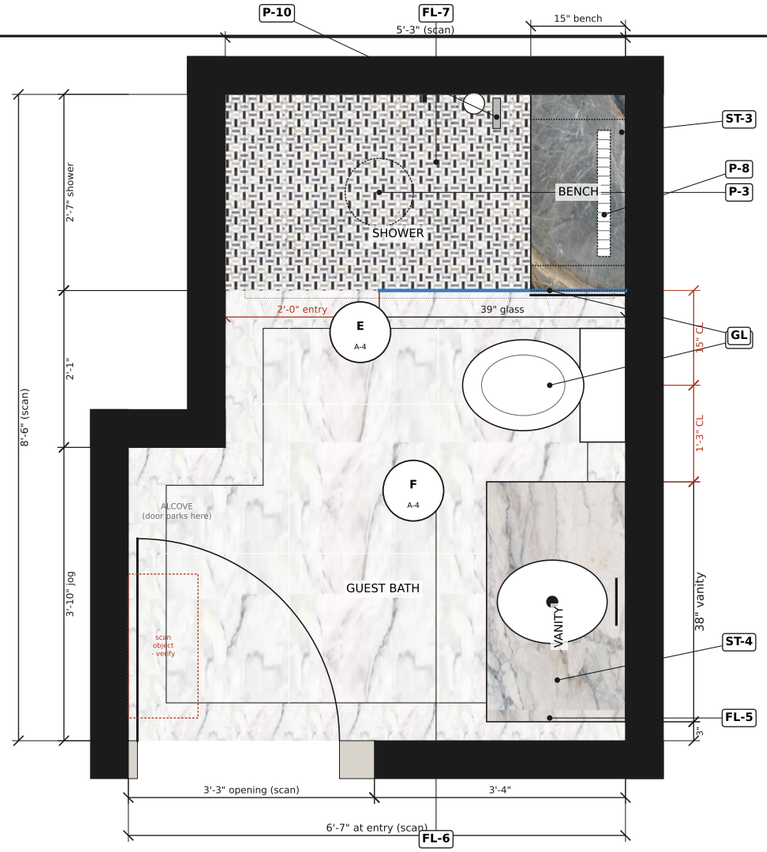


1 **GUEST BATH - FIXTURE & FINISH PLAN**

Scale 1/2" = 1'-0"

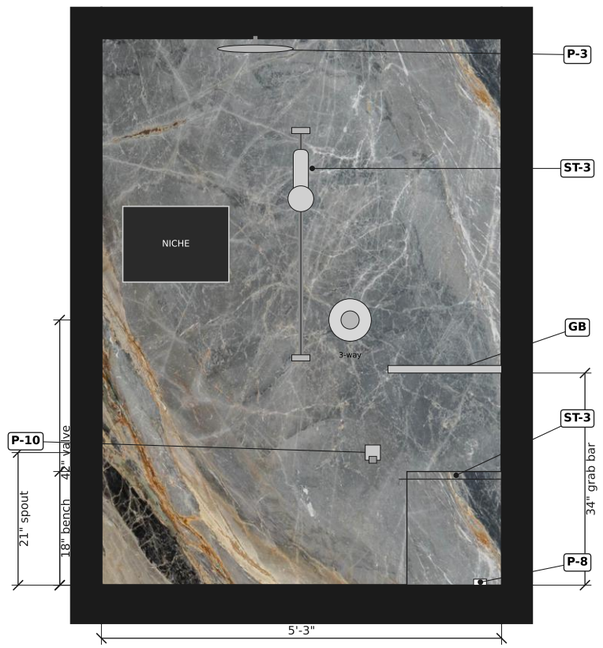

E **SHOWER WALL (EAST)**

Scale 1/2" = 1'-0"

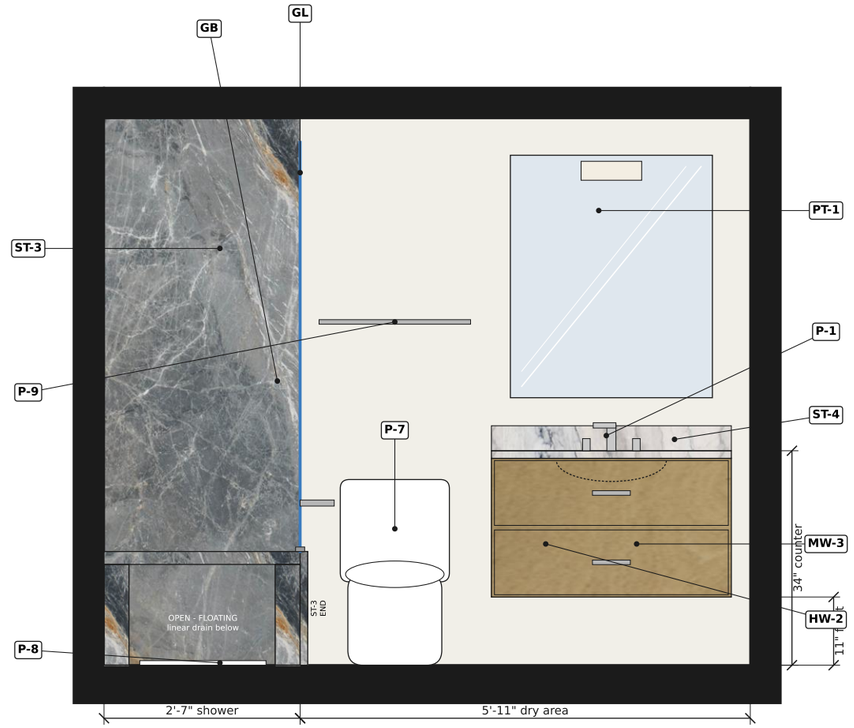

F **SOUTH WALL - SHOWER / WC / VANITY**

Scale 1/2" = 1'-0"

LAYOUT FROM POLYCAM SCAN (16 JUL 2026): 5'-3" x 8'-6" + 1'-3" x 3'-10" ENTRY JOG, CEILING 7'-2".

Entry is the 3'-3" opening found by the scan (no door leaf recorded) - 32" door shown; WC kept on the existing flange; verify drains on site.




ST-3 ST-4 MW-3 FL-5 FL-6 FL-7

GUEST BATH NOTES

1. Concept per DesignMySpace: ST-3 grey quartzite with gold / beige veining in the shower (owner pick 10 Nov; name, supplier, finish and slab size TBC - alts: green-black, Noir Blanc or 3 other slab options, see A-0) - slabs run vertically: one for the 63" back wall, one for the two 31" end walls, bench parts from the offcuts, so 2 slabs from one block if each is at least about 90" x 64". Seal on install, rectangular ST-3 stone bench as the feature, white Nova floor with 3" x 12" border, oak vanity. Brushed nickel throughout.
2. Shower 2'-7" x 5'-3" on the old tub footprint (2'-8" deep in the scan), WALK-IN with no door: one fixed glass panel (GL) 39" from the bench wall leaves a 24" walk-in entry (NKBA minimum). Controls on the back wall beside the bench (Houzz), reachable seated or standing: thermostatic valve with 3-way diverter at 42" for (a) a 12" ceiling rain head centred in the shower, (b) a hand shower on a slide bar, (c) low spout P-10 at 21" for buckets / foot rinsing. Grab bars (GB): 18" horizontal at 34" over the bench, 18" vertical at the entry. Curb-less if the slab depression allows; 20" linear drain P-8 along the bench wall UNDER the floating bench, FL-7 mosaic sloped to it.
3. Bench: floating 2" ST-3 slab, 15" deep x 2'-7" long x 18" high (Houzz 17-19"), on two 4" end supports in the same ST-3 stone (no tile anywhere on the bench) plus concealed steel wall brackets; open below so the drain stays reachable. It runs to the glass with no gap: the glass is notched 15" x 18" and sits on the bench top in a siliconed channel; the end face below the glass is clad in ST-3, mitred to the top. Top slopes 1/8" per ft away from the glass. Niche 17" x 12" at the far end of the back wall, clear of the controls.
4. Vanity: 38" x 22" floating, moved off the entry wall into the space freed by keeping the WC on its flange - 3" clear of the entry wall, 15" to the WC centreline; MW-3 stained white oak vertical grain, two drawers with HW-2 pulls, ST-4 White Camouflage top with 4" backsplash, Contrac Calvin undermount sink, Vivenis widespread faucet. Mirror 30" x 38" with sconce above (electrical by others).
5. WC: Contrac Eglinton TL-3100A, kept on the EXISTING flange (scan: centreline 4'-8" from the entry wall) - 15" from the vanity end and 15" to the shower glass, so no slab coring. Moving the flange about 5" toward the vanity (offset flange / core) would buy a 3'-0" deep shower - contractor to price. Entry: the scan records a 3'-3" opening at the jog end of the hallway wall with no door leaf; a 32" door is shown hinged on the jog side so it parks in the 1'-3" alcove clear of the vanity. The scan also shows an object about 11" x 23" against the alcove wall - verify and remove/relocate. Vanity and WC are on the SOUTH wall; paper holder on the south wall at 26" AFF.
6. Walls outside the shower: PT-1 paint. The grey veined wall tile pictured in the 4 Nov email was not named - if it is intended for the dry-area walls, confirm the product and it will be added as ST-6.
7. Floor: FL-6 Nova Como 23.6" field with FL-5 Nova Satin 3" x 12" border, one tile wide, in the dry area; grout to match tile.

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-4 GUEST BATHROOM - PLAN & ELEVATIONS** Scale 1/2" = 1'-0" (on 11 x 17)	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-4**

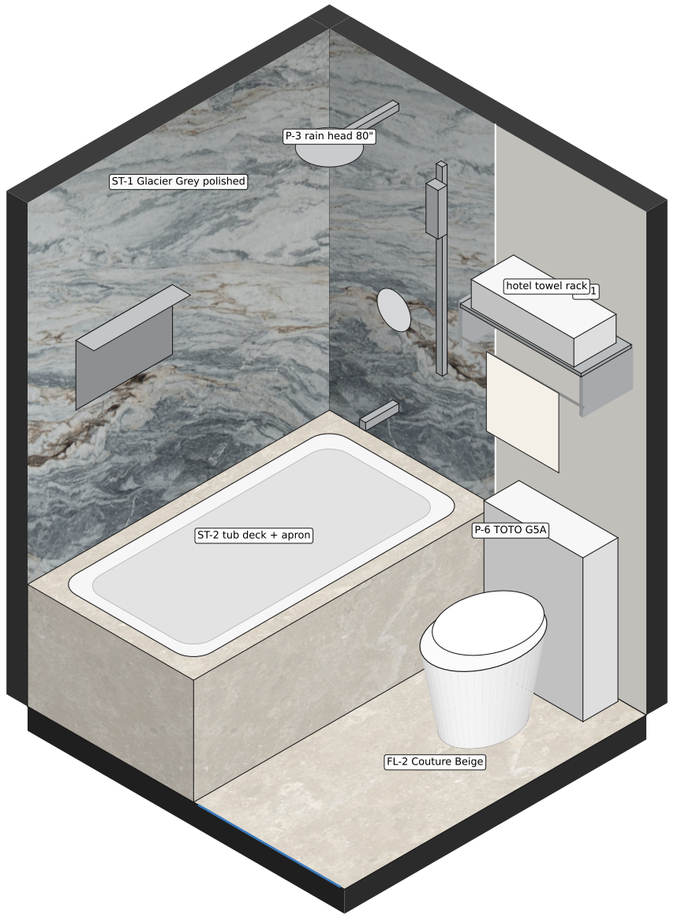

1 **ENSUITE - LOOKING NW TO THE TUB WALL**

Scale NTS



2 **SERVERY - FROM THE BEDROOM**

Scale NTS




3 **GUEST BATH - LOOKING SE**

Scale NTS

These are schematic finish studies drawn from the plan geometry with the selected materials mapped on, to show how the palette reads in each space; they are not photoreal renderings, and lighting, grout and vein placement are indicative only.

ST-1 texture is CAVA's own photo of the Glacier Grey slab (block 001, from their website); every slab differs, so approve the block in person. Ceilings from the Polycam scan: bathrooms 7'-2", bedroom / servery 7'-10"; guest bath 5'-3" x 8'-6" plus the 1'-3" entry jog (see A-4).

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-5 3D VIEWS - FINISH STUDIES (ISOMETRIC CUT-AWAY)** Not to scale	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-5**

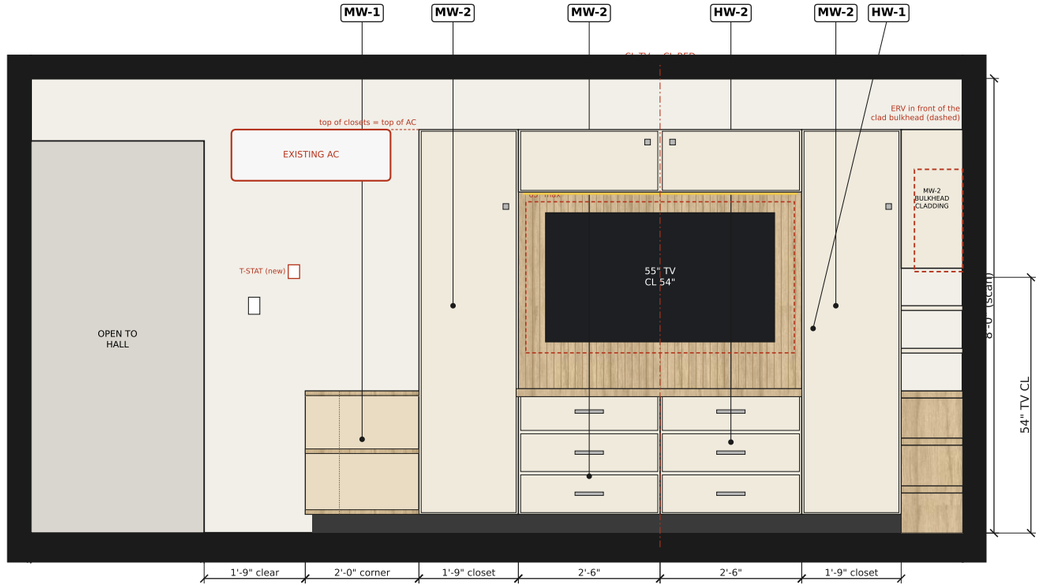

G TV WALL - CORNER SHELVES / CLOSET / DRAWERS + TV / CLOSET (LOOKING NORTH)

Scale 3/8" = 1'-0"




H SOUTH WALL - BENCH / HEADBOARD (LOOKING SOUTH)

Scale 3/8" = 1'-0"



BEDROOM MILLWORK NOTES


1. TV wall, entry to window: about 21" of clear wall at the open entry; a quarter-round open MW-1 wood shelf unit (24" radius, 30" high, two tiers) under the AC; the LEFT 21" full-height MW-2 closet, starting 6" clear of the AC; a 5'-0" two-column drawer unit, 30" high (two 30" columns of three drawers, MW-2 with an MW-1 wood top) with a 55" TV wall-mounted above it, centre 54" AFF, under a bridge cabinet that joins the two closets, on an MW-1 fluted wood back panel that fills the wall between the two closets from the drawer top to the top of the AC; the RIGHT 21" full-height closet in its previous position; and three open MW-1 shelves (13" wide x 24" deep, at 10", 20" and 30") recessed into the 13" pocket under the ERV, flush with the closet fronts, with an MW-1 wood back panel up to the top shelf like the corner shelves. The closet side panels facing both shelf units are lined in MW-1 to the shelf height; the ERV unit is also lined on the window wall and the back, and sits on a painted MW-2 base with the same 4" toe kick as the closets, so each open unit reads as one wood piece. The TV and drawers are centred between the two closets and the bed is centred on the TV.
2. Closets (Houzz custom-closet rules): two separate 21" x 24"-deep closets, one full-height door each, closet tops aligned with the top of the AC (7'-1"), hat shelf at 80" inside. LEFT closet - rod at 78" for shirts and blouses above afixed shelf at 41"; two adjustable shelves for folded pants and sweaters below, and two angled shoe racks at the bottom (two pairs each, 7-12" per pair). RIGHT closet - rod at 78" for jackets and tops above an interior drawer stack to 42" (owner reference): a glass-topped jewellery tray, then three glass-front pull-out drawers. About 42" of hanging rod in total; long coats go to the dressing-area wardrobe.
3. TV: 55" wall-mounted, centre lowered to 54" AFF (more comfortable from the bed), with a 24"-deep MW-2 bridge cabinet above it joining the two closets (72" to the closet top, two doors, LED strip underneath lighting the fluted panel); about 6" to each closet; the dashed outline shows a 65" (about 1-1/2" to each closet - the largest that fits). Back panel: MW-1 vertical fluted / slatted wood panel, about 3/4" proud of the wall, between the closets from the drawer top to the top of the AC, with the TV bracket blocked behind it. Provide a recessed TV box and a cable chase down to the drawers. The AC stays exposed with 6" clear to the left closet - confirm the manufacturer side clearance. AC / ERV positions are estimated from the owner's photo - verify.
4. Window-wall corner: the box in the corner is a BULKHEAD (not a cabinet) - clad it in MW-2 white millwork from just below its underside (55") to the closet top (7'-1"), the full 13" pocket wide and about 16" deep, stopping short of the ERV, which stays exposed in front of it for service. Two open MW-2 white shelves (1" thick, at 39" and 48") fill the pocket between the MW-1 shelves and the cladding.
5. The thermostat falls behind the TV - relocate it to the wall beside the light switch at the entry (HVAC by others).
6. South wall: bench/storage unit MW-2, 2'-0" deep x about 5'-6" long, FB-1 upholstered top, 18" high, a 3/4" MW-2 backsplash panel from the seat to the underside of the bedding cabinet and a 4"-deep x 16"-high FB-1 back cushion against it (about 19" of seat left), with ONE full-length drawer under the seat (about 5'-4" wide x 11" high, two HW-2 pulls, heavy-duty full-extension slides - throws, pillows, shoes); above it a 16"-deep MW-2 BEDDING CABINET from 59" (lined up with the headboard surround) to the ceiling, three hinged doors (a pair plus a single) with 12" vertical HW-2 pulls at the bottom of the opening edge, so they are easy to reach from the floor and one adjustable shelf - about 36" of clear height, deep enough for folded king comforters, duvets, blankets and sheet sets; leaves about 41" of headroom over the seat; stopping 9" short of the west nightstand. The short wall at the bench end is EXISTING and stays.
7. Headboard: FB-1 channel-upholstered panel 54" high between built-in nightstands (20" wide x 18" deep x 25" high, either side of a KING 76" x 80" bed) styled after the owner's reference: framed box with a 1/2" overhanging top, open cubby, two drawers with HW-2 bar pulls, sitting on a 3" recessed plinth instead of legs, all within an MW-2 painted surround with a 4" cap. Wall sconces (linen drum shade, about 4'-0" AFF) above each nightstand (electrical by others).
8. Rug FL-4 (Milliken Fiddlehead) laid on the FL-2 tile from 12" off the TV/drawer unit to the headboard wall (under the nightstands) and from the west nightstand to the east wall - approx. 8'-8" x 9'-8" - see A-1. Confirm with Milliken whether the pattern is supplied as a bound area rug or needs binding.

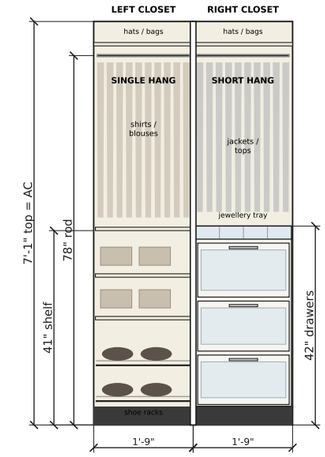

G1 CLOSET INTERIORS (DOORS OFF)


Scale 3/8" = 1'-0"

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-6 BEDROOM MILLWORK ELEVATIONS** Scale 3/8" = 1'-0" (on 11 x 17)	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-6**

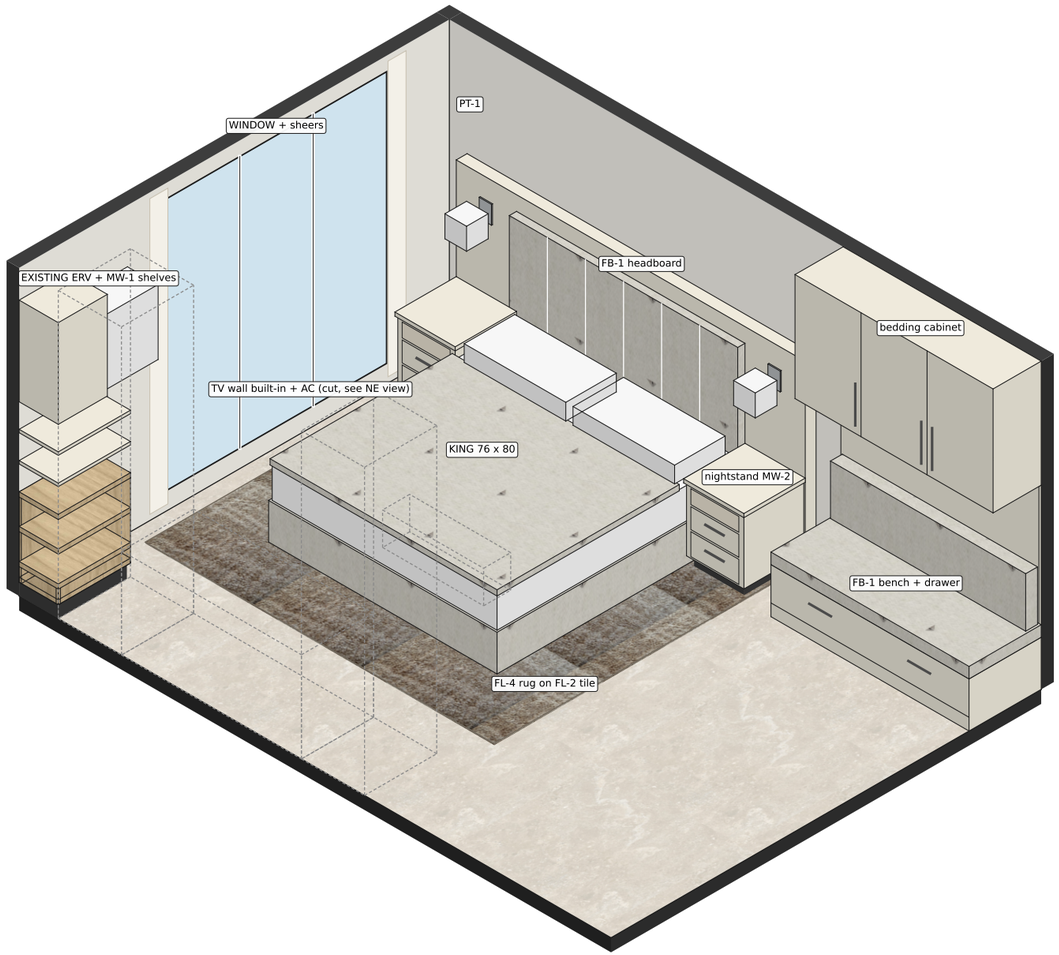

1 **PRIMARY BEDROOM - LOOKING SE (HEADBOARD WALL)**

Scale NTS

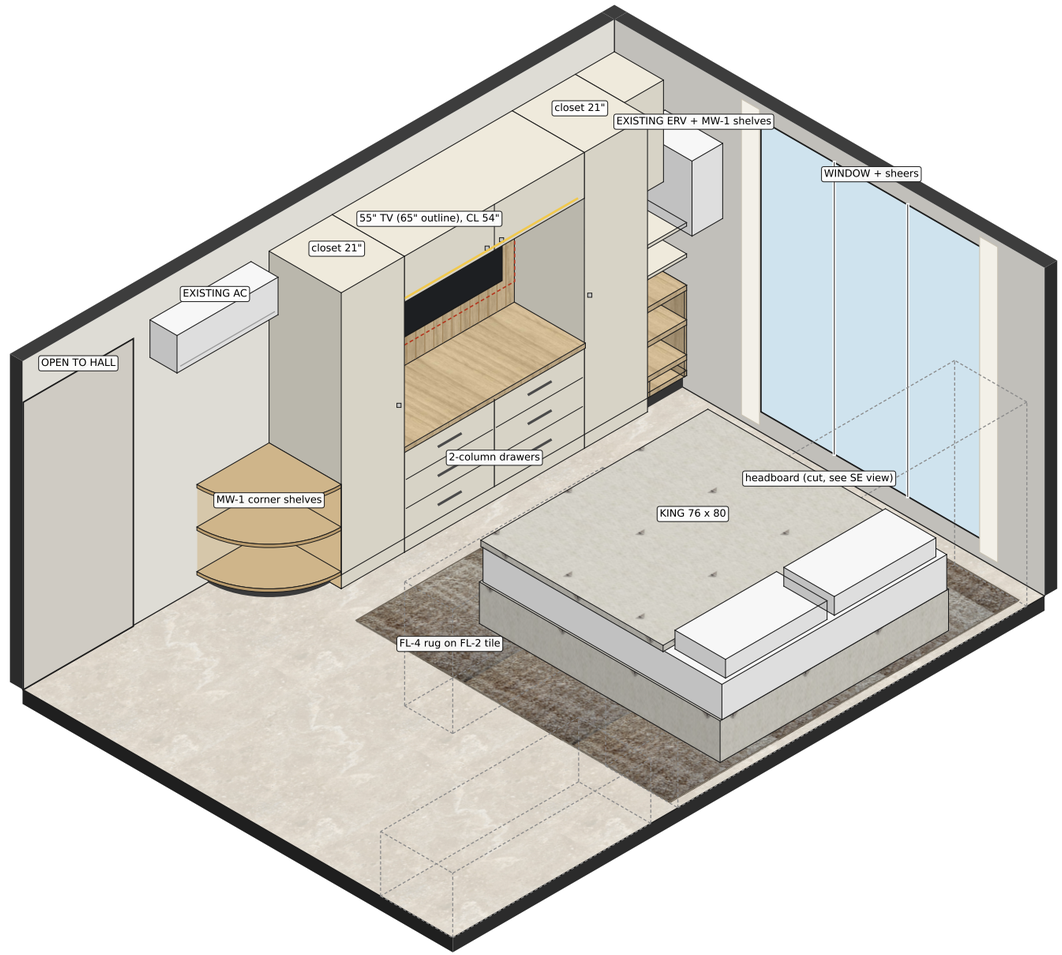


2 **PRIMARY BEDROOM - LOOKING NE (TV / CLOSET WALL)**

Scale NTS

Schematic finish studies drawn from the A-1 plan with the selected materials mapped on. Each view cuts away the two walls nearest the viewer; furniture against a cut wall is shown dashed so the room stays visible - the other view shows it in full.


Floor FL-2 Couture Beige throughout with the FL-4 Milliken rug running under the nightstands to the headboard wall. Millwork MW-2 Swiss Coffee, niche panel MW-1, headboard and bench FB-1 JF Presley. Room size, window (6'-1" full height) and 7'-10" ceiling from the Polycam scan (16 Jul 2026).

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-7 PRIMARY BEDROOM - 3D VIEWS** Not to scale	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-7**

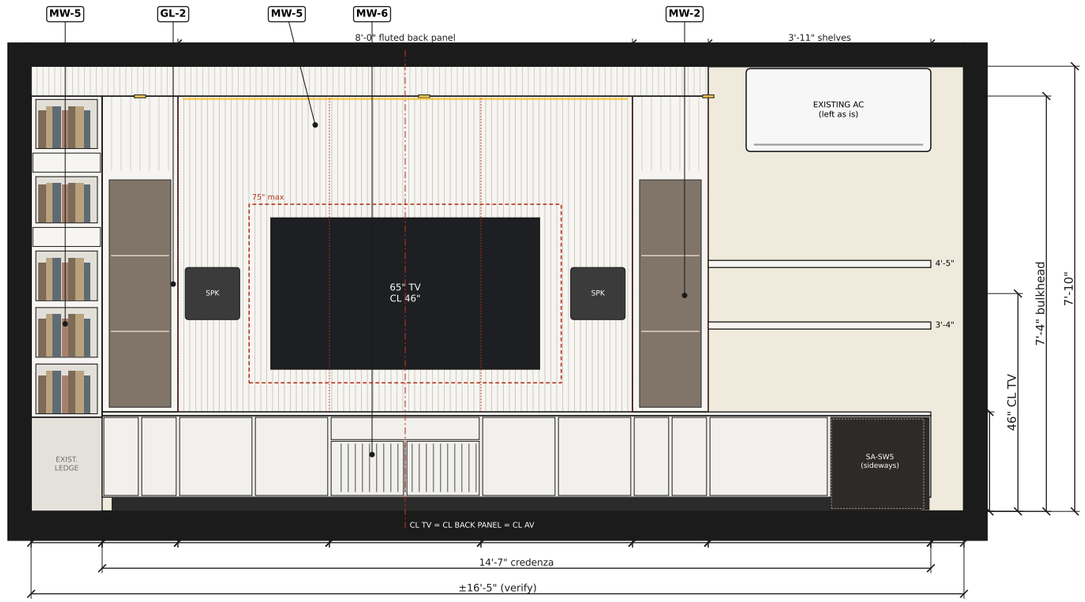

J **TV WALL - ELEVATION (LOOKING SOUTH)**

Scale 3/8" = 1'-0"

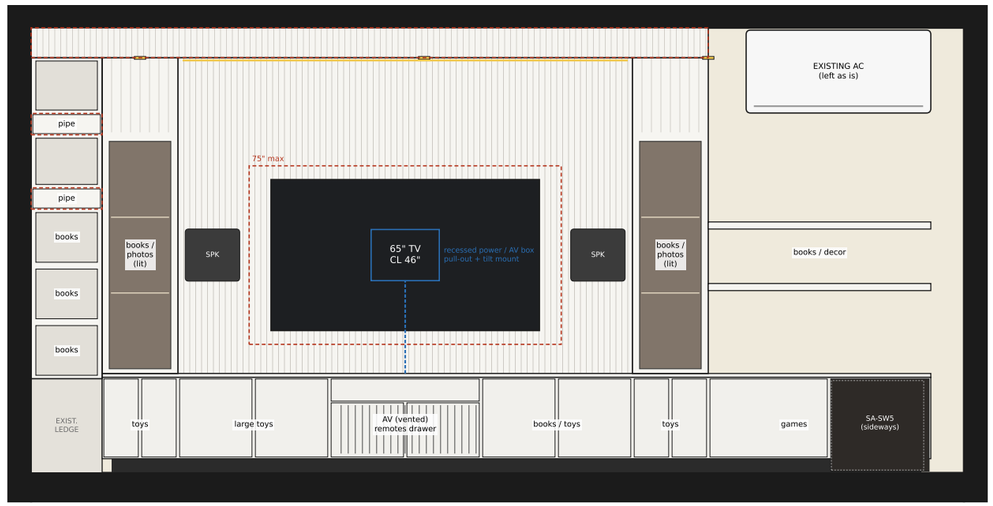


J1 **TV WALL - CONTENTS AND EXISTING VENTS / BULKHEAD (DASHED)**

Scale 3/8" = 1'-0"

NOTES

1. Credenza 16" deep x 21" high, MW-6 painted body and top - high-gloss white lacquer (option A, matches the kitchen; alternate C soft greige), recessed plinth, push-to-open. Five sections whose joints line up with both glass cabinets: toys, large toys, AV (centred on the TV) (vented doors, remotes / charging drawer above; Quad control box here), books / toys, games + subwoofer bay.
2. Speakers: Sony BRAVIA Theatre Quad (HT-A9M2). Front pair WALL-MOUNTED on the supplied Sony brackets (not flat), onto the MW-5 fluted back panel, centred 46" AFF (level with the TV centre), 2" off each edge of the 75" outline (1-1/2" clear of the glass cabinets); solid blocking behind the panel for 4 mm x 30 mm+ screws; about 36" clear above each speaker to the bulkhead (Sony: nothing tight above them). Control box in the AV section. SUBWOOFER SA-SW5 (10.6" W x 18.9" H x 19.5" D): too deep to face front in a 16" credenza, so the end bay has no bottom or plinth and the sub stands on the floor turned sideways (19.5" along the wall), with acoustic fabric on the front and end panels; credenza raised to 21" to clear it. Confirm with Sony that the sideways orientation and about 1/2" side clearance are acceptable.
3. Left strip (owner measurements 5 Nov): existing ledge (about 20") and existing bulkhead stay. OPEN MW-5 shelving all the way up - three 11.9" openings from the ledge to the lower pipe, one between the pipes and one above the top pipe to the bulkhead; the pipes get slim MW-5 wraps only.
4. Glass cabinets: two 16" MW-5 cabinets with a single GL-2 tinted glass door each (LED-lit glass shelves), one either side of the TV, from the credenza top to the bulkhead. The right one ends with the existing bulkhead, 8" clear of the AC, and the floating shelves cantilever off its side under the AC.
5. Back panel: MW-5 painted vertical fluted panel (1-1/4" flutes), 3/4" proud, from the credenza top up to the existing bulkhead, between the two glass cabinets - frames the TV and speakers; TV mount and speaker brackets fix through it into blocking.
6. Existing bulkhead (stays): no overhead storage, but it is clad in MW-5 painted slats (soffit and fascia, 3/4" proud) from the window wall to the end of the bulkhead (nothing built within 8" of the AC), so it reads as part of the millwork. Its 3 pot lights are replaced by three slim 2" LED downlights in the soffit (over the left glass cabinet, the TV and the right glass cabinet) and an LED wall-wash strip at the back of the soffit grazing the fluted panel; all dimmable, 2700-3000 K.
7. Existing AC left as is. Floating shelves below it, cantilevered off the side of the right glass cabinet to the credenza end: MW-5, 10" deep, 47" long, fixed into the cabinet side and the wall, two shelves at 40" and 53" (top shelf under the AC removed).
8. TV: 65" (dashed outline shows a 75" fits - the speakers are set 2" off the 75" edges) on a pull-out + tilt mount, centred on the back panel (6'-7" from the window wall), 46" AFF, recessed power / AV box, conduit down to the AV section.
9. Wall length ±16'-5" - site-measure before shop drawings.

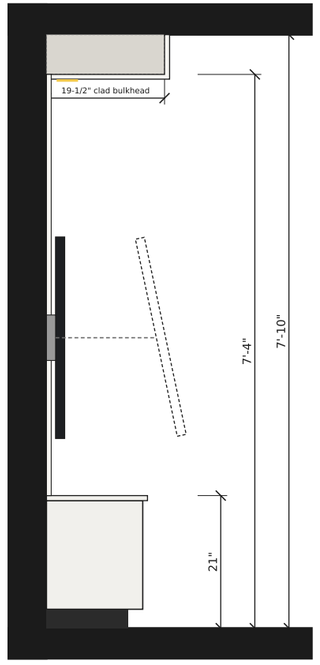

K **SECTION AT TV**

Scale 1/2" = 1'-0"

MW-6 MW-5 MW-2 GL-2 FL-0


PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-8 LIVING ROOM - TV WALL UNIT** Scale 3/8" = 1'-0" (section 1/2" = 1'-0") on 11 x 17	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-8**



1 **LIVING ROOM - LOOKING SOUTH-EAST TO THE TV WALL (RED = ALIGNMENT LINES)**

Scale NTS

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-9 LIVING ROOM - 3D VIEW** Not to scale	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-9**

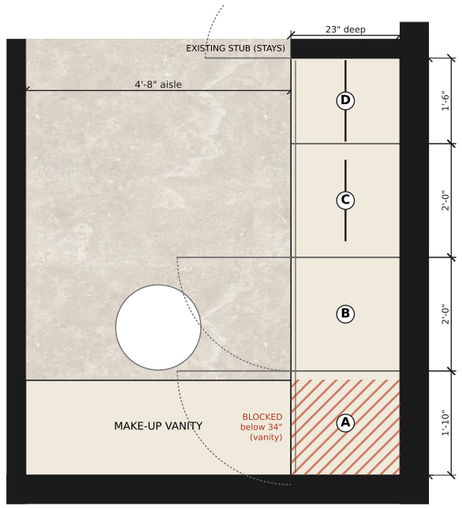

1 DRESSING AREA - ENLARGED PLAN

Scale 3/8" = 1'-0"



L WARDROBE - ELEVATION (LOOKING EAST)

Scale 1/2" = 1'-0"




L1 WARDROBE - INTERIOR (DOORS OFF)

Scale 1/2" = 1'-0"

WARDROBE NOTES (HOUZZ CUSTOM-CLOSET RULES)

1. Dressing-area wardrobe (east side of the make-up / dressing area), 7'-4" long x 23" deep, from the vanity corner to the EXISTING wall stub (stays), 7'-0" doors with 10" upper cabinets to the 7'-10" ceiling, 4" recessed toe kick. MW-2 painted, plywood interiors, HW-1 knobs / HW-2 pulls to match the bedroom.
2. Bay A (22") - Corner - make-up & hair-tool cabinet: Below 34": fixed panel, no door (the vanity is in the way); the blind space behind is a deep shelf reached from bay B for long-term storage. Above: OPEN - no door (owner, 5 Nov), 34" to 84" over the vanity top; a taller 18" bottom section with a 16" rotating turntable (lazy Susan) on the 34" shelf for everyday make-up and skincare, then shelves at 52", 62" and 72" for bags and backstock; outlet inside for a hair dryer / straightener (heat-safe metal holder); LED strip.
3. Bay B (24") - Drawer bank + shelves: Starts 2" past the vanity so drawers clear it. Four full-extension soft-close drawers to 34", lined up with the bay A opening above the vanity so the fronts read as one line: two shallow 6" (felt-lined for jewellery, watches, belts) over two 9" (underwear, socks, workout). Above: one door 34"-84" (same line as the bay A opening) with a fixed shelf at 34" and adjustable shelves at 12" for folded sweaters and tees.
4. Bay C (24") - Double hang: Two rods: upper at 81", lower at 40" (Houzz double-hang heights) for shirts, blouses, folded trousers and skirts. Pull-down valet hook on the side panel.
5. Bay D (18") - Long hang + shoes: Rod at 72" (dresses, coats - 64" clear drop) above two angled shoe shelves (2 pairs each at 9" per pair); 18" wide.
6. Upper cabinets across all four bays, 84" to the ceiling (about 10" clear): luggage, out-of-season items, spare bedding; reach with a step stool.
7. Clearances: drawers start 2" north of the vanity; every door is 24" or narrower so an open door leaves about 32" to pass in the 4'-8" aisle; the make-up stool stays clear of the bay B drawers. LED strips on door switches in bays A, C and D (electrical by others).

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-10 DRESSING-AREA WARDROBE** Scale 1/2" = 1'-0" (plan 3/8" = 1'-0") on 11 x 17	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-10**

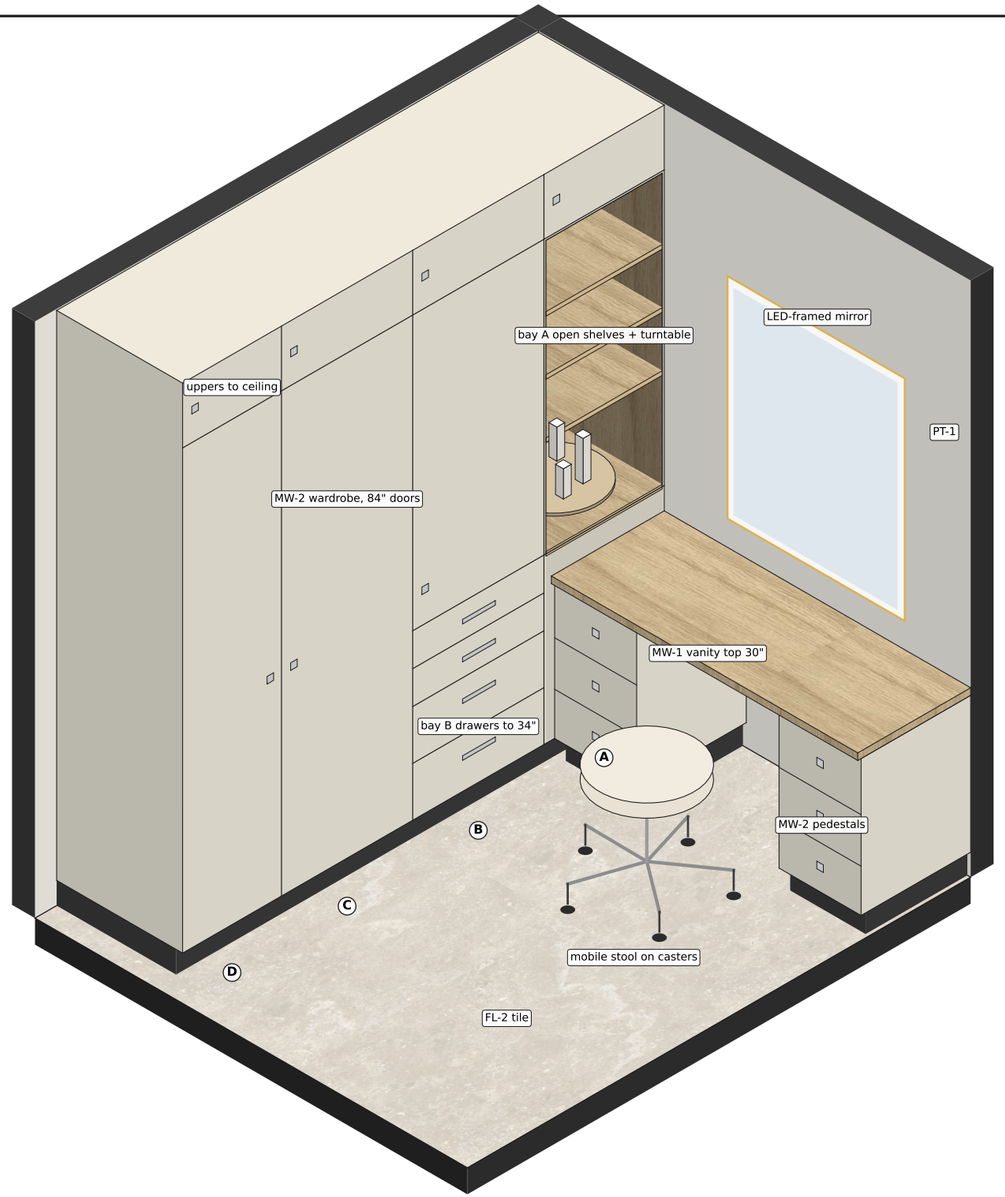

1 **MAKE-UP VANITY + WARDROBE - LOOKING SE**

Scale NTS

NOTES

1. Schematic finish study drawn from the plan geometry with the selected materials mapped on (same method as A-5); not a photoreal rendering.
2. Looking south-east from the bedroom side: make-up vanity on the south wall, wardrobe on the east wall.
3. Make-up vanity (A-3, elevation D): two MW-2 pedestals with drawers, MW-1 top at 30", LED-framed mirror; no shelf above the mirror.
4. Wardrobe (A-10): 7'-4" x 23" deep, MW-2 painted, HW-1 knobs / HW-2 pulls; bay A open shelves (no door) from 34" over the vanity, an 18" bottom section with a 16" turntable then 10" sections (fixed panel below), bay B four drawers to 34" with the door above on the same line, bays C and D full-height doors, uppers 84" to the 7'-10" ceiling.

PROJECT	SHEET	BASIS	STATUS	DATE / SHEET NO.
NM CONDO - PRIMARY SUITE, GUEST BATH & LIVING ROOM Owners: Nada & Mazen | Design direction: DesignMySpace Inc. (D. Elkhatib, BID)	**A-11 DRESSING AREA - 3D VIEW (ISOMETRIC CUT-AWAY)** Not to scale	Layout: DesignMySpace base plan 16 Jul 2026 / refined plan 4 Nov 2026. Finishes: Spec Schedule 27 Sep 2026 + options email 4 Nov 2026 + owner picks	**PRELIMINARY - NOT FOR CONSTRUCTION** Verify all dimensions on site. Plumbing clearances to be confirmed by contractor.	04 NOV 2026 **A-11**